

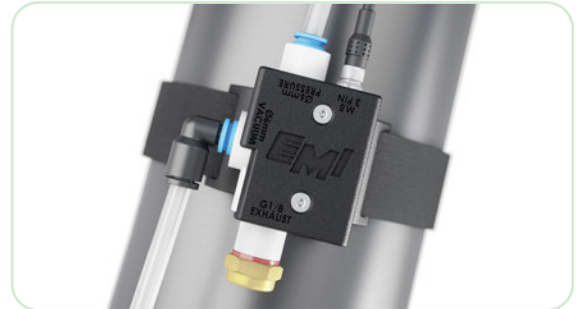


Vacuum Generator – Festo

- Available in High-Vacuum or High-Flow versions.
- Housing made of light, impact-resistant plastic.
- Switching output: PNP
- Electrical cables can be found on page 266.

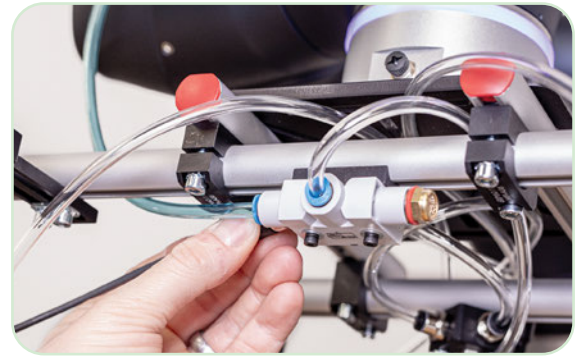

See EMI's Vacuum Generator Kit on page 258

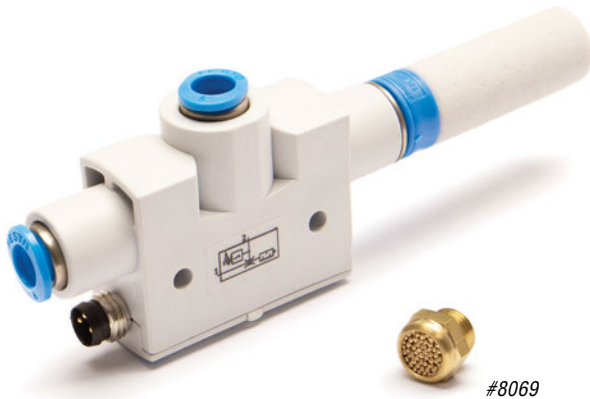

#8069

Quick#	Part#	Price	Max Vacuum Level*	Max Suction Flow*		Air Consumption*		Std. Supply Pressure		Wt**
				CFM	l/min	CFM	l/min	psi	Bar	
8091	VN10H-T4-PQ2-VQ2-O1P	\$218.00	93%	0.77 CFM	21.8 l/min	1.97 CFM	55.8 l/min	87 psi	6 Bar	36g
8099	VN10L-T4-PQ2-VQ2-O1P	\$257.14	65%	1.47 CFM	41.6 l/min	1.97 CFM	55.8 l/min	87 psi	6 Bar	36g

*Values listed are achieved when supplied the listed standard supply pressure. Max operating pressure is 8 Bar / 116psi.
 **Overall Length and weight with standard silencer (shown in the drawing below). This is reduced when using Quick# 8069.

Pin#	Function	Wire	Control Box Terminal
1	Power (Vdc)	Brown	+24Vdc
3	Ground	Blue	0Vdc
4	Signal	Black	Digital Input (DI)

Vacuum Generator Accessories

Quick#	Part#	Description	Price
8069	AMTE-M-H-G18	G1/8" Short Brass Silencer	\$2.63
244	GSF-G-G8	G1/8" Sealing Ring (use with #8069)	\$0.24

